

Griglia per canale grigliato modulare **PRATIKO**




GS10999



GS13999



GS20999

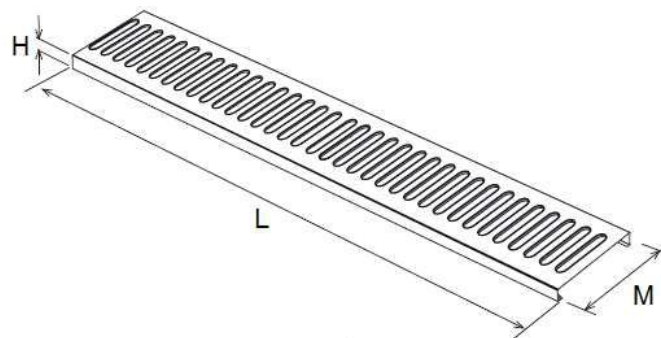

| Descrizione | U/M | Codice | | |
|--|-----------------|------------|------------|----------------|
| | | GS10999 | GS13999 | GS20999 |
| Peso | g | 990 | 1650 | 2950 |
| Lunghezza "L" | mm | 998 +/-1,0 | 998 +/-1,0 | 998 +/-1,0 |
| Larghezza totale "M" | mm | 99 +/-1,0 | 128 +/-1,0 | 198 +/-1,0 |
| Altezza "H" | mm | 12 +/-1,0 | 20 +/-1,0 | 20 +/-1,0 |
| Larghezza asola | mm | 7,6 | 9 | 8 |
| Lunghezza asola | mm | 83 | 80 | 129 |
| Distanza tra asole | mm | 27 | 27 | 27 |
| Distanza tra bordo e rilievi antiscivolo | mm | 32 | 16 | 20 |
| Distanza tra rilievi antiscivolo | mm | 36 | 30/36/30 | 29/29/42/29/29 |
| Passaggio acqua | cm ² | 260 | 290 | 440 |

Materiale: Acciaio INOX (AISI 316)

Caratteristiche: La griglia carrabile è completa di marcatura CE, in conformità alla norma UNI EN 1433.
 - Carico di rottura 9 KN
 - Classe di resistenza al carico (UNI EN124) = A15



FIRST PLAST S.r.l.
 Località Isola Grande
 17041 ALTARE (SV) - ITALIA
 Tel. +39 019 58511
 Email: infofirst@firstcor.com

