



Helical extractors

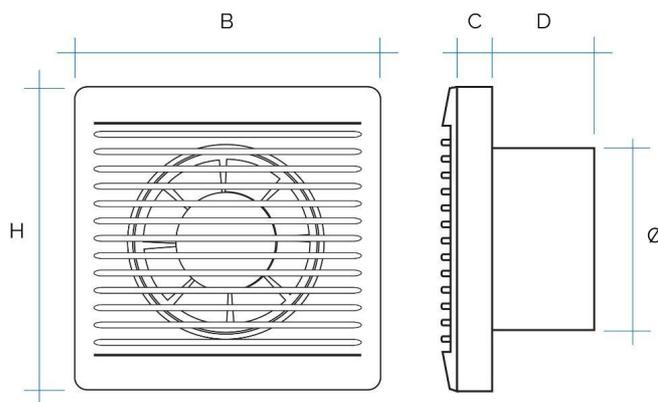

Flow rate curve

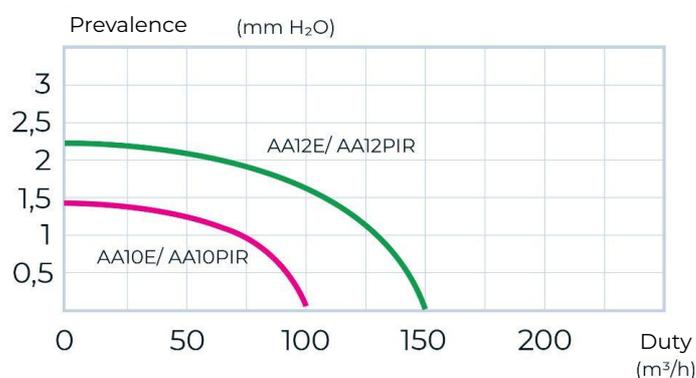

Insulation class I - IPX1

Item	Colour	BxH mm	Ø Hole mm	P watt	Air flow m ³ /h	Noise dB	C mm	D mm	Ø mm
AA10PIR	white	157x157	100/4"	13	98	38	22	56	98
AA12PIR	white	175x175	120/5"	16	138	41	20	56	118

Description: Wall-mounted helical extractor with infrared sensor and timer

Features: The helical aspirator is complete with infrared and timer. It is activated by proximity and remains active for 5 minutes. 180° detection angle and max detection distance 12 m. The helical aspirator is a simple and versatile solution to solve the problem of air exchange for a certain type of domestic environment, such as service bathrooms or laundry rooms. Helical extractors are suitable for direct wall outlet or for installations where it is not necessary to flow the air on very long distances through the ducts.

