


Left side flashing for Tegola sheet

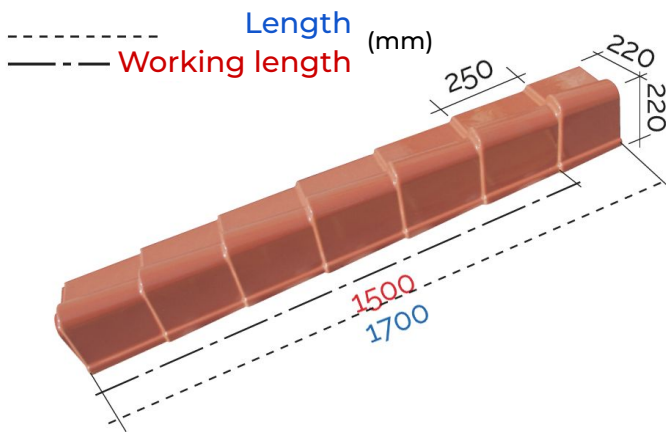

Available colours:

TC Rustic Red	MS Dark Brown ref. RAL 8017
BA Slate Blue ref. RAL 7016	TOP Matt Rustic Red

Item	Colour	Dimensions mm	Matching sheets
CSTSXTC	TC	1700x220x220	TE02ITC
CSTSXMS	MS	1700x220x220	TE02IMS
CCSTSXBA	BA	1700x220x220	TE02IBA
CSTSXTOP	TOP	1700x220x220	TE02ITOP

Material: Technopolymer

Use: The lateral flashings of the roofing sheet Tegola allow the closure between the sheets positioned at the lateral end of the pitch and the vertical wall (see images below), so that the covering is continuous also at the sides.

Installation: For correct installation, starting from the ridge line:

- position the flashing above the lateral wave of the sheet and align it with its pitch (see Fig. 1);
- fix the flashing to the sheet on each wave with the CO00N cap (see Fig. 2, detail A);
- the flashing must also be fixed on the vertical wall using the flat caps (see Fig. 2, detail B).

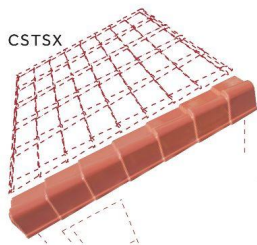


Fig. 1

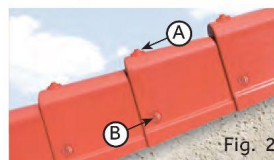


Fig. 2

A The washer CO00N has the optimal curvature to fix the lateral flashing to the underlying sheet and to the supporting structure.

B The O-ring cap is the ideal accessory for fixing the lateral flashing of the Tegola sheet to the vertical wall.

