

Roofing sheet Coppo reinforced

Available colours:



Antique Red




Matt Rustic Red

INSTALLATION
GUIDE


STANDARD LENGTHS

Item	Colour	Length m	Sheet area m ²	Weight kg
CXL020ANC	ANC	2,08	2,14	10,27
CXL020TOP	TOP	2,08	2,14	10,27

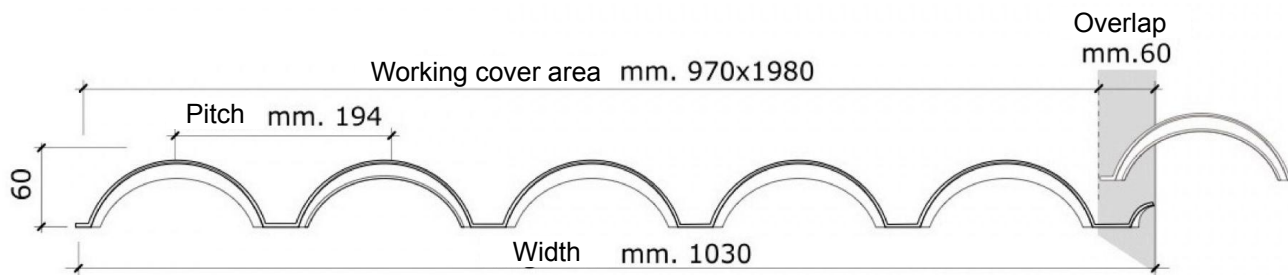

COVER LIFE allows our customers to optimize any work by choosing the length of the roofing sheets, as shown in the drawing here below.

CUSTOM LENGTHS

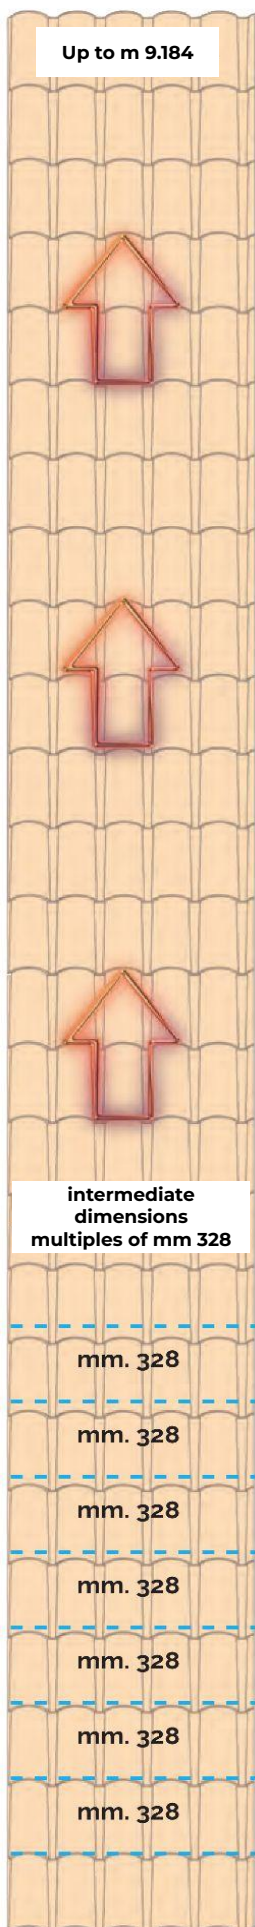


Item	Colours	Length m	Sheet area m ²	Weight kg
CXL022	ANC / TOP	2,296	2,36	12,06
CXL026	ANC / TOP	2,624	2,70	13,78
CXL029	ANC / TOP	2,952	3,04	15,51
CXL032	ANC / TOP	3,280	3,38	17,23
CXL036	ANC / TOP	3,608	3,72	18,95
CXL039	ANC / TOP	3,936	4,05	20,68
CXL042	ANC / TOP	4,264	4,39	22,40
CXL045	TOP	4,592	4,73	24,12
CXL049	TOP	4,920	5,07	25,84
CXL052	TOP	5,248	5,41	27,57
CXL055	TOP	5,576	5,74	29,29
CXL059	TOP	5,904	6,08	31,01
CXL062	TOP	6,232	6,42	32,74
CXL065	TOP	6,560	6,76	34,46
CXL068	TOP	6,888	7,09	36,18
CXL072	TOP	7,216	7,43	37,91
CXL075	TOP	7,544	7,77	39,63
CXL078	TOP	7,872	8,11	41,35
CXL082	TOP	8,200	8,45	43,07
CXL085	TOP	8,528	8,78	44,80
CXL088	TOP	8,856	9,12	46,52
CXL091	TOP	9,184	9,46	48,24

DIMENSIONAL FEATURES

Width mm	1030 ± 5
Length mm	2080 ± 10
Working cover area mm	970x1980 ± 5
Pitch mm	194
Profile height mm	60
Thickness mm	2,5 ± 0,2
Weight kg/m ²	4,8 ± 5%
Underside colour	Beige
Maximum loading at 20°C*	kg 420

* With a distance between fixings of **670 mm**.
The load is applied on the roofing sheet centre and spread out on the entire width

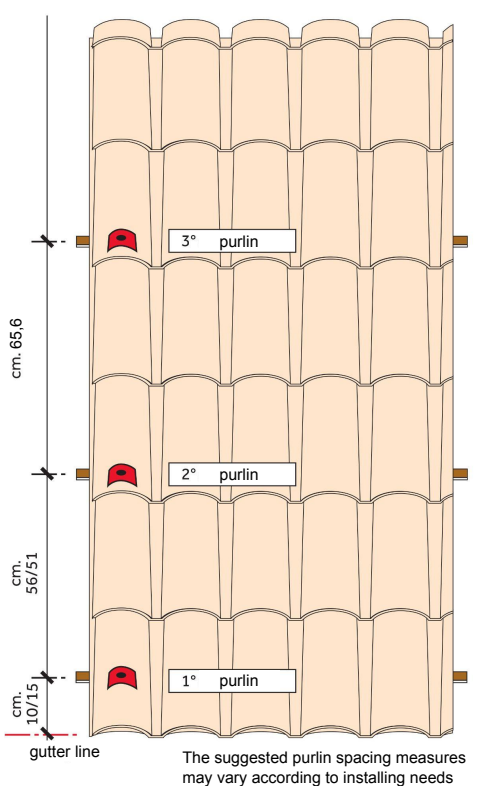


FRAMEWORK AND PURLINS

The purlin spacing for the Coppo sheet must be precisely arranged according to the pitch of the sheet and the distance between the fixings. The first purlin must always be placed cm 10-15 from the edge of the sheet. The size of the overhang will be determined according to the position of the gutter anchorings. The span between the next purlins will measure cm 65.6, exactly twice the pitch (cm 32.3), as shown in the figure. To optimize the roofing installation, it is advisable to verify the purlin spacings before starting the sheet laying.

OVERLAP AND MINIMUM SLOPE

The longitudinal overlap of the sheets must be positioned maintaining the aesthetic continuity of the roofing, the sheet must be placed on the lower one in correspondence with the tooth identifiable above the last row of tiles. The recommended minimum slope of Coppo sheets is 20% (11°); in case of inclination lower than 20% the longitudinal overlap of the sheets will be equal to the length of a whole pantile.




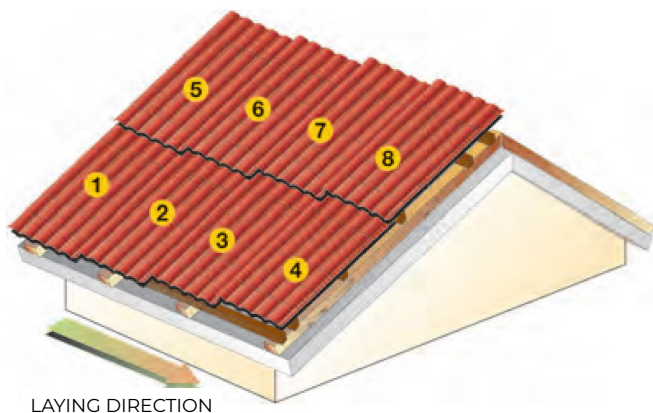


SHEETS LAYING DIRECTION

To install the Coppo sheets you have to follow an obligatory laying direction from the left to the right and an optimum overlap designed to obtain the maximum usable roof area (see picture).

The vertical overlap must be positioned preserving the aesthetic continuity of the sheets.

Laying instructions:

ADVISABLE DISTANCE	OVERLAP	MINIMUM SLOPE	LAYING SEQUENCE
			



Material:

Technopolymer

Features:

The layered polymer alloys used to make the sheet give the product resistance, lightness and elasticity, essential for roofing sheets

Use:

The Coppo sheet is suitable for roofing of civil dwellings, shelters, garages, bungalows and gazebos

