

Roofing sheet Rustica



Available colours:

Rough Natural
Brick

Antique Florence




Antique Venice



Antique Siena


STANDARD LENGTHS

Item	Colour	Length m	Sheet area m ²	Weight kg
RU021TNR	TNR	2,13	2,16	9,72
RU021ANF	ANF	2,13	2,16	9,72
RU021ANV	ANV	2,13	2,16	9,72
RU021ANS	ANS	2,13	2,16	9,72

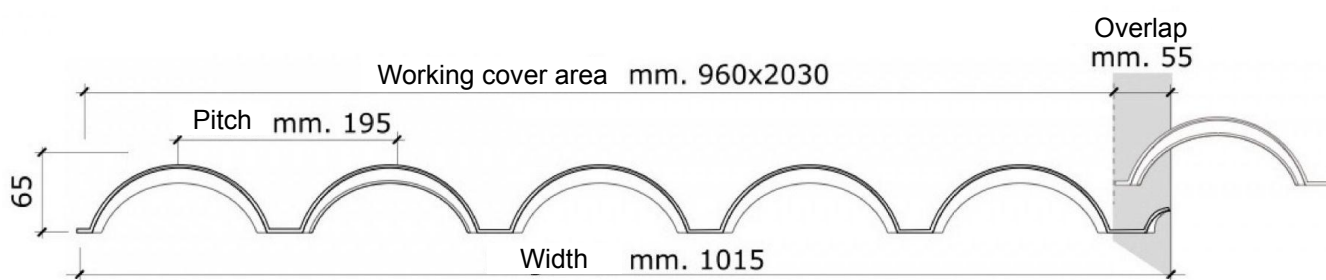

DIMENSIONAL FEATURES

Width mm	1015 ± 10
Length mm	2130 ± 10
Working cover area mm	960x2030 ± 5
Pitch mm	195
Profile height mm	65
Thickness mm	2,4 ± 0,2
Weight kg/m ²	4,50 ± 5%
Underside colour	Beige
Maximum loading at 20°C*	kg 530
Maximum loading at 20°C**	kg 250

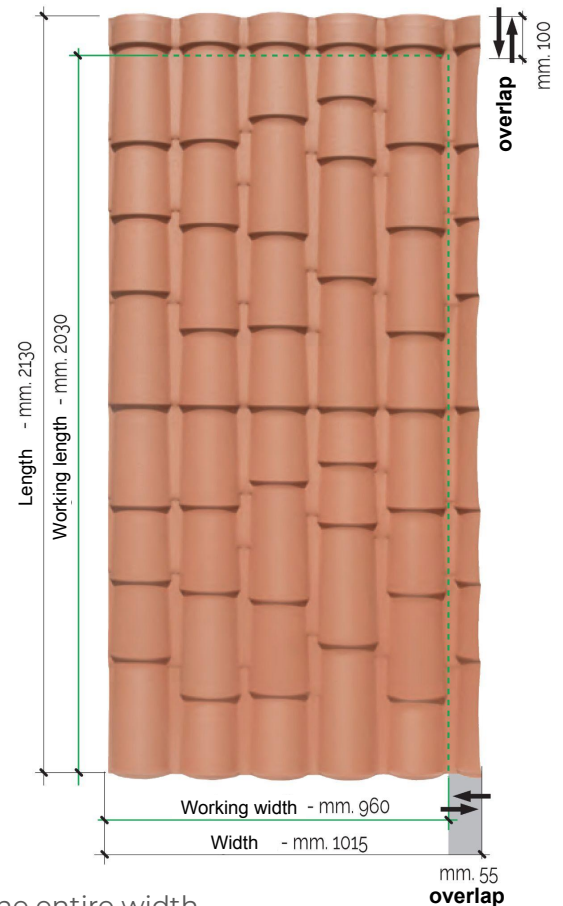


* With a distance between fixings of **690 mm**.

The load is applied on the roofing sheet centre and spread out on the entire width

** **With a distance between fixings of 1000 mm.**

The load is applied on the roofing sheet centre and spread out on the entire width

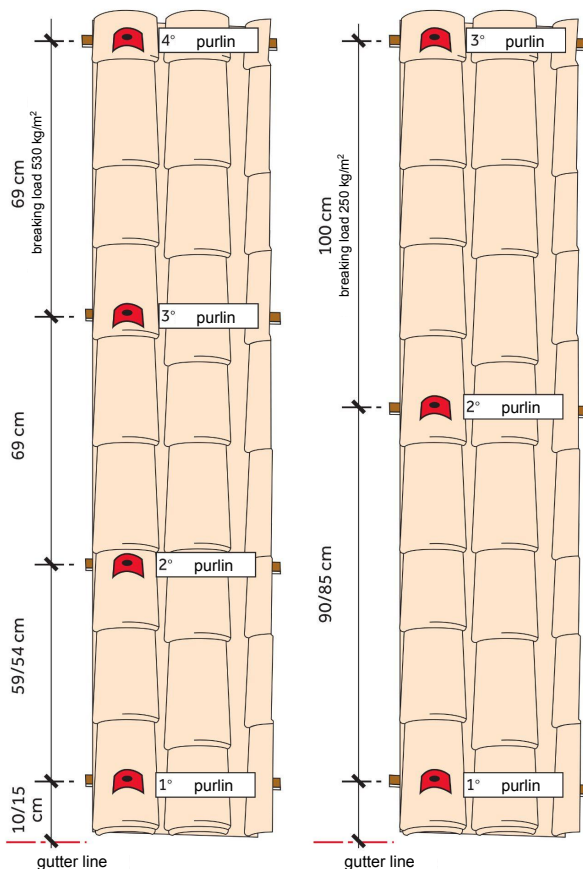

The suggested purlin spacing measures may vary according to installing needs

FRAMEWORK AND PURLINS


The purlin spacing for the Rustica sheet must be precisely arranged according to the pitch of the sheet and the distance between the fixings. The first purlin must always be placed cm 10-15 from the edge of the sheet and the second one at 59/54 cm. The size of the overhang will be determined according to the position of the gutter anchorings. The span between the next purlins will measure cm 69 as shown in the picture on the left to obtain a breaking load of 530 kg. If the span between the next purlins will measure cm 100 as shown in the other picture on the right, the breaking load will be 250 kg.

To optimize the roofing installation. It is advisable to verify the purlin spacings before starting the sheet laying.

OVERLAP AND MINIMUM SLOPE

The longitudinal overlap of the sheets must be positioned maintaining the aesthetic continuity of the roofing, the sheet must be placed on the lower one in correspondence with the tooth identifiable above the last row of tiles.

The recommended minimum slope of Rustica sheet is 20% (11°): in case of inclination lower than 20% the longitudinal overlap of the sheets will be equal to the length of a whole pantile.




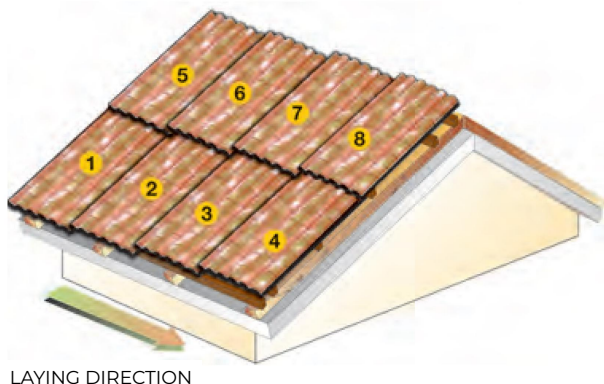


SHEETS LAYING DIRECTION

To install the Rustica sheets you have to follow an obligatory laying direction from the left to the right and an optimum overlap designed to obtain the maximum usable roof area (see picture).

The vertical overlap must be positioned preserving the aesthetic continuity of the sheets.

Laying instructions:

ADVISABLE DISTANCE	OVERLAP	MINIMUM SLOPE	LAYING SEQUENCE
			



Material: Technopolymer

Features: The layered polymer alloys used to make the sheet give the product resistance, lightness and elasticity, essential for roofing sheets

Use: The Rustica sheet is suitable for roofing of civil dwellings, shelters, garages, bungalows and gazebos

