




FIRST[®]
CORPORATION

PVC SLOTTED GRID **HOST 25**

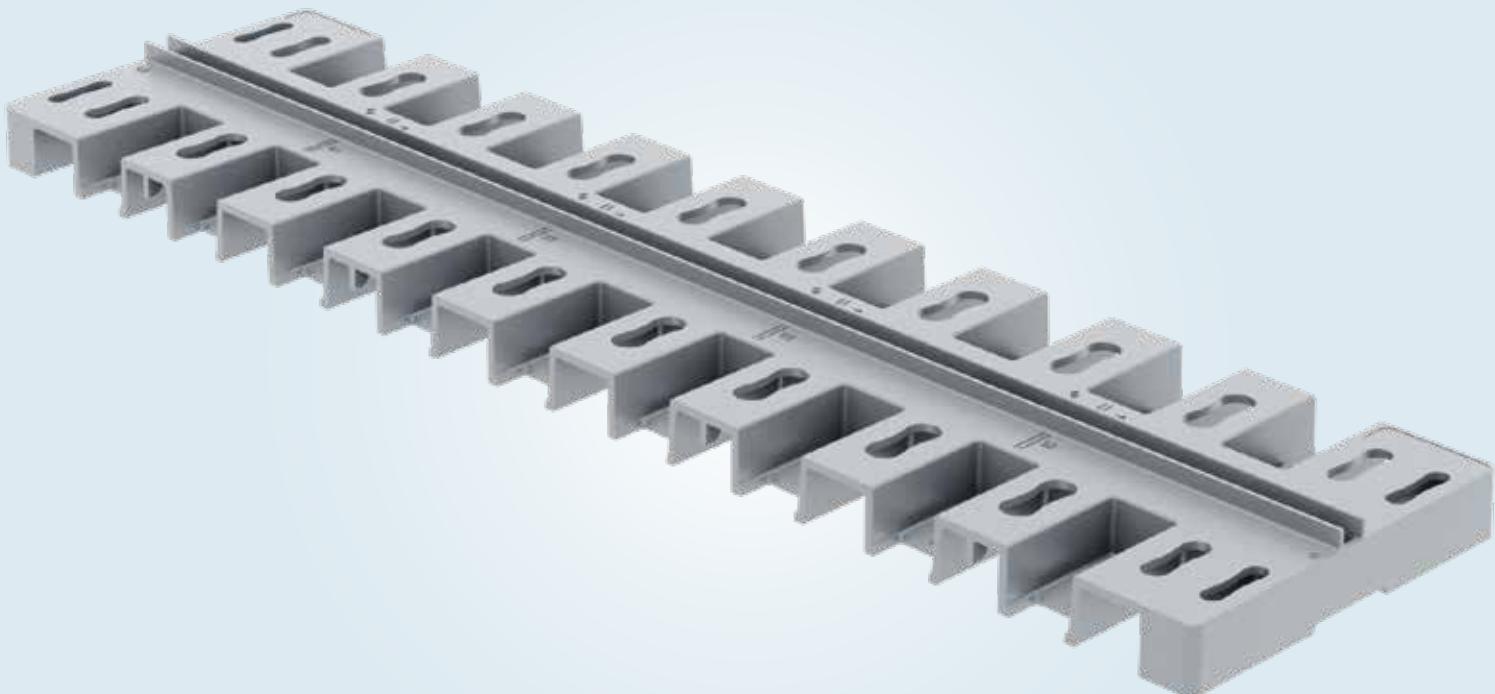


The grid you can't see but that drains perfectly



A15
CLASS



PERFECT BALANCE
BETWEEN
FORM AND FUNCTION



MODULAR ELEMENTS
ALLOW EASY
INSTALLATION




TWO
INSTALLATION
METHODS

100% MADE IN
ITALY

Installation Options

Wall-Flush Installation


When the ghost 25 slotted grating is installed flush against a wall, it creates a discreet and elegant drainage line. This solution is ideal for modern outdoor spaces where visual cleanliness and a minimal aesthetics are essential. Wall-flush installation optimises rainwater collection along perimeter surfaces without interfering with the architectural design.

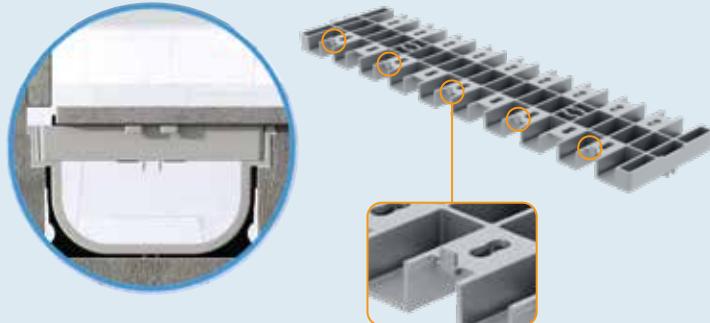

Position the grid with the pins facing upwards.

Central Drainage

When the Ghost 25 slotted grating is positioned centrally, water drains away more naturally, ensuring fast and efficient drainage. This solution is suitable for courtyards, yards or paved surfaces with adequate slopes.

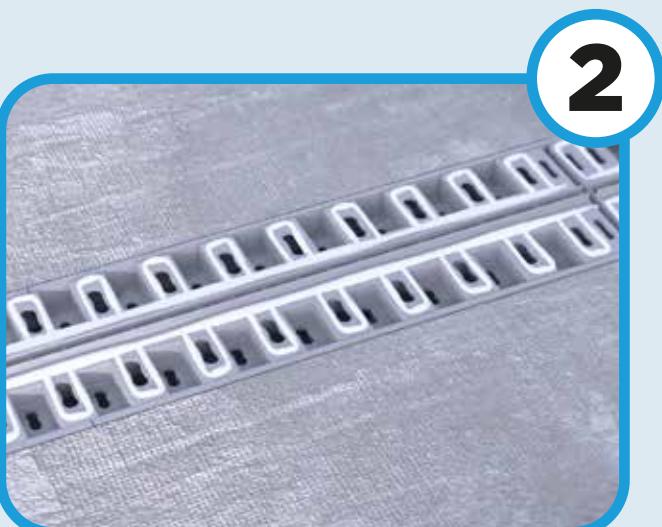

Position the tiles so that they adhere properly to the walls of the central slot.

Inspection System

In both wall-mounted or central drain installations, it is possible to integrate an inspection pit directly using the grating itself. This system allows quick access for maintenance and cleaning, guaranteeing long-term efficiency and functionality. The number and positioning of the inspection points should be adjusted according to the length and configuration of the drainage channel.

1. Remove the 5 lateral notches and the MF plug-in pins
2. Cut the tile to the external dimensions of the grating
3. Drill the tile to match the positions of the M8 nut seats
4. Insert the M8 nuts into the appropriate slots for lifting the grating/tile
5. Glue the tile, ensuring the holes align with the nuts
6. The channel can be inspected by lifting the fixed screws inserted in the nuts
7. **IMPORTANT:** Joints around the tile must not be filled



Inspection is also possible using a portion of the grid.

It is recommended to use two-component polyurethane adhesives to bond the flooring to the PVC grating.

Technical Specifications


A mm	mm 500
B mm	mm 129
C mm	mm 20
Central slot width	mm 7,4
Centre slot edge height	mm 6
Weight	gr 434

CODE	COLOUR
GRF130G	Grey

- Water flow area (upper side, central slot): ~32 cm²
- Water flow area (lower side, lateral slot) : ~39 cm²
- Single grating drainage capacity

(theoretical value calculated on the assumption of a 20 mm slot):

- Central drain mode: 1,1 l/s
- Side drop mode: 1,3 l/s

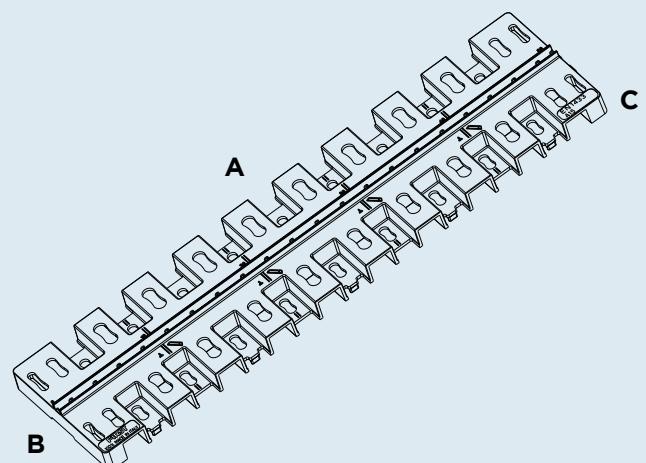

Competitive Advantages

- Minimal Design for contemporary projects
- Maximum drainage efficiency
- High mechanical resistance
- Easy maintenance
- Perfect compatibility with modern materials
- Low thickness, ideal for constrained structural contexts

Slotted grid Ghost 25 is the best solution for discreet and effective drainage



Outdoor spaces



Balconies and terraces



Indoor spaces

Produced by:



First Plast S.r.l.
Località Isola Grande, 17041 Altare (SV) - Italia
+39 019 58511
info@firstcor.com